

6. **½ Tent (any brand):** Footprint Tarp Easy Setup Camping Tent with Rainfly Double Layers
Waterproof Automatic Hydraulic Mechaism

Technical Details

Special Feature	Quick Setup, Rainproof, Windproof
Occupant Capacity	2
Design	Camping Tent
Material	Polyurethane, fabric, tarp
Color	Blue/Black
Installation Type	Pop Up
Product Care Instructions	Hand Wash
Assembly Time	1 Minutes
Pole Material Type	Fiberglass
Size	1-2 Persons
Closure Type	Zipper
Number of Doors	2

Address:

Phone:

P.O. Box # 1502, Norzin Lam, Thimphu, Bhutan

+975 77889977

Website:

www.tashicell.com



བགྲིས་བད་དོན་བརྒྱུད་འབྲེལ་སྒྲེང་ཆོད་འཛིན།

Tashi InfoComm Private Limited

Fabric Type	210D Oxford fabric
Maximum Height	140 Centimeters
Floor Area	52.14 Square Feet
Base Material	pe,pu
Style	Modern/Outdoorsy Dome Tent
Water Resistance Level	Waterproof
Assembly Required	No
Number of Rooms	1
Stake Material	metal
Tent Floor Material	Polyethylene, Polyurethane
Support Pole Attachment Mechanism	Pre-Attached
Number of Vestibules	1
Number of Guylines	4
Number of Stakes	1
Rainfly Material	210D oxford fabric PU 3000
Is Waterproof	True
Ultraviolet Light Protection	[Inferred] Some Ultraviolet Light Protection
UPC	781573225778

Address:

P.O. Box # 1502, Norzin Lam, Thimphu, Bhutan

Phone:

+975 77889977

Website:


www.tashicell.com

Tashi InfoComm Private Limited

Form Factor	Dome
Model Name	ZP-33-BL-UK
Manufacturer	Huilingyang
Assembly Instructions Description	Easy to set up and take down in minutes using the hydraulic pressure mechanism.
Item Package Dimensions L x W x H	32.68 x 8.11 x 7.32 inches
Package Weight	5.69 Kilograms
Item Dimensions LxWxH	78.74 x 55 x 78.74 inches



8. 4 Men A-shaped Tent

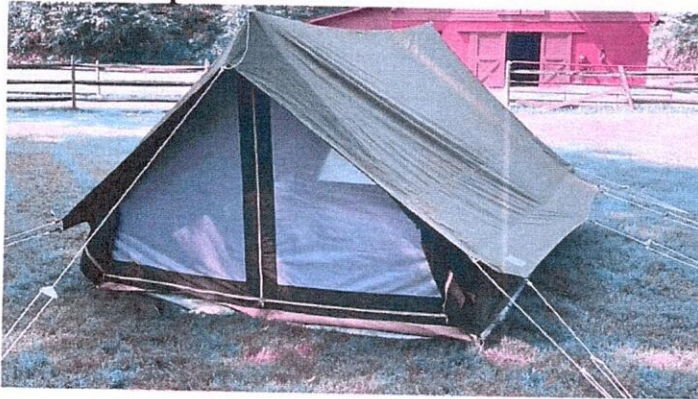

Address:
Phone:

P.O. Box # 1502, Norzin Lam, Thimphu, Bhutan
+975 77889977

Website: www.tashicell.com

Tashi InfoComm Private Limited

Weather Resistance

- WATERPROOF poly-cotton canvas.
- • Mold & mildew resistant.
- • Rip-stop and waterproof floor extends 3 inches above the ground.
- • Dries quickly.
- Army green 200 gsm poly-cotton canvas. 35% cotton, 65% polyester blend

The Fabric

- • Waterproof.
- • Mesh: no-see-um proof.
- • Double-stitched at all stress points.

Built-in-Features


- Enclosed floor made of a waterproof PVC 19 oz. rip stop material.
- • 2 mesh and canvas doors on either side of the tent can be unzipped individually.
- • 4 screened windows can be exposed for airflow with a pull-of-a string.
- • 2 internal pockets provide extra storage.
- • Durable SBS zippers throughout.
- • 2 x ceiling lantern hook points.
- • 41" x 10" Storage bag doubles as a backpack when tent is unpacked (though the tent is heavy).
- • Stainless steel D-rings for F1 tent floor pegs.
- • Simple 15 minute set-up.

Dimensions

- Patrol Tent Footprint: 11 ft Long x 8 ft 9 in Wide
- • Staked pup tent footprint requires another 3-4 feet off each side of the tent
- • Center height: 6 ft. 2.5 inches (72.5 inches)
- • Wall height: 21"
- • Door height: 6' 2.5"
- • Packed Weight: 46 lbs. (Tent + Pegs + Poles + Ropes + Bags)
- • True 4-Person A-frame tent sleeping capacity.



Rope:
High Strength Utility Rope for Industrial use (100 Meter, 16 mm) for liftings telecom structures. It should be compatible with above pulley.

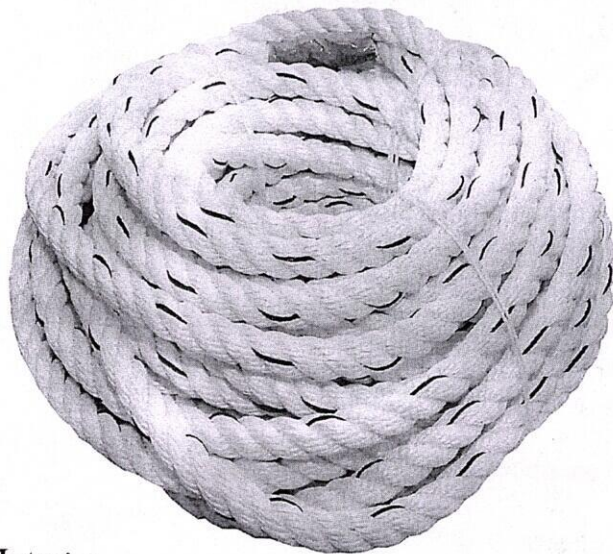

Material Nylon
Length 100 METER

SL-5 Compass:
CASON (DEVICE OF C) Professional High Accuracy Metal Waterproof Military Compass for Directions
(8 X 6.5 X 3 Cm, Green)
Brand CASON (DEVICE OF C)
Material Metal



+975 77889977



P.O Box 1502, Samten Lam, Thimphu, Bhutan

Yachay



<https://www.tashicell.com>



བགྲིས་བད་དོན་བརྒྱད་འབྲེལ་སྒྲིལ་སྒྲིལ་ཆོད་འཛིན།

Tashi InfoComm Private Limited

S/L 35: Bhutan made HDPE Pipe 25mm 100m PN 12.5

Product: High Density Polyethylene (HDPE) Pipe

Diameter: 25 mm

Length: 100 m roll

Pressure Rating: PN 12.5 (12.5 bar) – suitable for medium pressure applications such as water supply and irrigation systems

Material Grade: PE100 (high-strength HDPE)

Color: Typically black (may include identification stripes)

S/L 36: Bhutan made HDPE Pipe 32mm 100m PN 12.5

Product: High Density Polyethylene (HDPE) Pipe

Diameter: 32 mm

Length: 100 m roll

Pressure Rating: PN 12.5 (12.5 bar) – suitable for medium pressure applications such as water supply and irrigation systems

Material Grade: PE100 (high-strength HDPE)

Color: Typically black (may include identification stripes)

S/L 37: Bhutan made HDPE Pipe 50mm 100m PN 12.5

Product: High Density Polyethylene (HDPE) Pipe

Diameter: 50 mm

Length: 100 m roll

Pressure Rating: PN 12.5 (12.5 bar) – suitable for medium pressure applications such as water supply and irrigation systems

Material Grade: PE100 (high-strength HDPE)

Color: Typically black (may include identification stripes)

S/L 38: GI Pipe 50mm

Product: Galvanized Iron (GI) Pipe

Nominal Diameter: 50 mm (2" nominal)

Length: 6 meters per piece (standard industrial length)

Material: Mild Steel with zinc galvanization for corrosion resistance



+975 77889977



P.O Box 1502, Samten Lam, Thimphu, Bhutan



<https://www.tashicell.com>